

# NITE-RF

**Unmanaged Industrial Ethernet Switch RJ45**  
Fast Ethernet



**Reliable, space-saving networking in the control cabinet with only 32.5 mm installation depth**

- Flexible use with 24 VAC/VDC
- Minimal installation depth 32.5 mm
- Temperature range -40 to +70°C
- Polarity protection
- IP30 metal housing
- Inrush current limitation
- Stable mounting on 35mm DIN rail
- PROFINET suitable

# Unmanaged Industrial Ethernet Switch RJ45

## Fast Ethernet



With an installation depth of only 32.5 mm and a height of 105 mm, the Industrial Ethernet switches impress with their extremely flat and high-quality aluminium housing. The ultra-compact switches can be used in any control cabinet thanks to the 24 VAC/VDC power supply with inrush current limiting and reverse polarity protection. Due to the reduced footprint and the arrangement of all connections on the front, switch cabinets and cabling can be optimized to reduce the costs. The high-quality DIN rail holder made of metal ensures a firm and secure hold on the DIN rail. Like all TERZ Industrial Ethernet switches, the flat NITE-RF are available in two frame forwarding variants and fully suitable for PROFINET applications.

### General

**Switch:** IEEE802.3 Store and Forward; non-blocking wire speed

**Auto-Negotiation, Auto-MDI-X, Auto-Polarity:** Yes

**Frame size:** 2,048 Bytes

**MAC table size:** 2,000 addresses

**Quality of Service:** Yes – 4 priority queues

**Energy Efficient Ethernet:** No

**Flow Control:** No

**PROFINET suitable:** Yes

Port count (RJ45)	5	8	16
MTBF (SN 29500, Mio. h)	n.a.	n.a.	n.a.
Frame Forwarding (Art.-No.)	xxxxx0	xxxxx1	
LLDP, PTCP Delay 01:80:C2:00:00:0E	Forwarding	Blocking	
RSTP BPDU 01:80:C2:00:00:00	Forwarding	Forwarding	

### Power supply / electronics

**Nominal voltage:** Vin 24 VAC / 24 VDC

**Permitted voltage range:** 8 to 28 VAC / 9 to 36 VDC

**Connection type:** 3-pole pluggable, screw connector (+ - FE)

**Wire cross-section:** 0,08 to 2,5 (AWG 28 to 12)

**Supply circuit:** SELV DIN 60950 (circuit breaker 10 A)

**Inrush current limiter:** Yes

**Input fuse:** Yes, Interrupting rating 50 A @ 125 VAC / VDC

**Polarity protection:** Yes

**Power failure bridging:** 10 ms DIN 50155

**PCB Conformal Coating:** No

**Protection category:** III

**Isolation:** 0.75 kVDC; Vin ⇄ Ethernet Ports | Vin ⇄ housing

Port count (RJ45)	5	8	16
Power consumption (W)			
Idle   full load	0,4 0,9	0,4 1,15	n.a.
Input current (mA)			
Idle   full load	16   36	16   48	n.a.
Inrush current (A)	8	8	n.a.

### Mechanical properties

**Housing material:** Anodised aluminium, stainless steel

**Mounting:** 35mm DIN rail

**IP Protection class (operation):** IP30

Port count (RJ45)	5	8	16
Width (mm)	42	58	110
Height (mm)	105	105	105
Depth (mm)	32,5	32,5	32,5
Weight (g)	205	255	405

### Ethernet Interfaces

**IEEE Standards:** 802.3 10BaseT, 802.3u 100BaseT(X)

**Isolation:** 0.75 kVDC; Ethernet Port ⇄ housing | Port ⇄ Port

**Connection type:** RJ45

**Port Count | Speed:** 5,8 Ports | 10/100 Mbit/s

**Cable length:** 100 m (Twisted Pair, 0.14 mm<sup>2</sup> - 0.22 mm<sup>2</sup>, Cat 5)

### EMC and environmental specifications

**Operating temperature:** -40°C to 70°C

**Storage temperature:** -40°C to 85°C

**Relative humidity (operation):** 0%-95% (not condensing)

**Relative humidity (storage):** 0%-95% (not condensing)

**Atmospheric pressure (operation):** 2,000 m (795 hPa)

**EMC immunity:** DIN EN - 61000-6-2, 55024

**EMC radiated emission:** DIN EN 61000-6-4, 55032

**Mechanical stability:** DIN EN 61373


### Approvals and certifications

CE, DIN EN 60950-1

### Status and diagnostic indicators

**LED:** Power | Link/Activity per Port

### Drawing

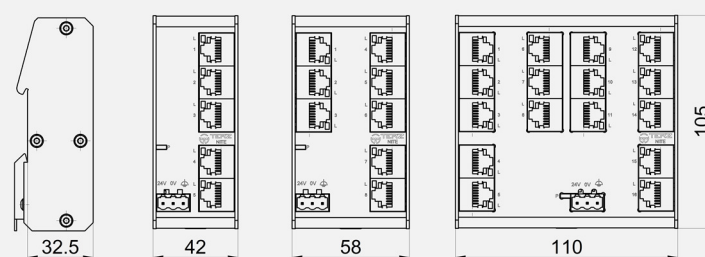

### Products

Article	Art.-No.	Specification
NITE-RF5-1100	111400	5xRJ45, IP30, FE, 24 V
NITE-RF8-1100	111600	8xRJ45, IP30, FE, 24 V
NITE-RF16-1100	111800	16xRJ45, IP30, FE, 24 V
NITE-RF5-1101	111401	5xRJ45, IP30, FE, 24 V, LLDP Blocking
NITE-RF8-1101	111601	8xRJ45, IP30, FE, 24 V, LLDP Blocking
NITE-RF16-1101	111801	16xRJ45, IP30, FE, 24 V, LLDP Blocking

### Mounting accessories

Adapter for different alignments and wall mounting

Note: We reserve the right to make technical changes to this document without prior notice. TERZ assumes no responsibility or liability for any errors or inaccuracies in this document. All rights to this document and its contents are reserved. Duplication, use of the content or announcement to third parties in any form is not permitted without written permission from TERZ. Copyright © 2018 TERZ Industrial Electronics GmbH. All rights reserved.

TERZ Industrial Electronics GmbH  
Gewerbepark 5a  
D-49143 Bissendorf  
Tel. +495402 60 80 970  
Fax. +495402 60 80 979

270818  
TZDS11140XEA\_NITE-RF  
www.terz-ie.com  
info@terz-ie.com

